Knurled/Scalloped Clamping

Another solid family of utility knobs for mechanical and electric applications. Includes durable range of domed, recessed, and thru-hole options. Engraving, hot stamping, and pad printing available for all parts.

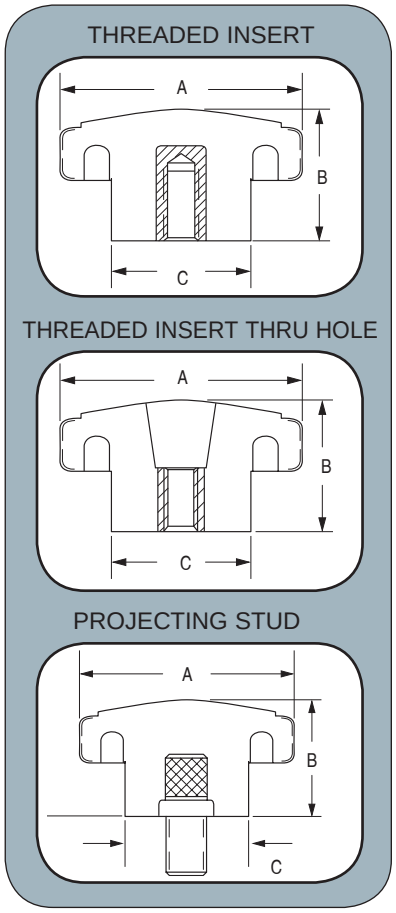

2750/2770/2790

2780

2752/2772/2792

2751/2771/2791

2760

Part Number	Recess on Top Diameter
2751	1.641
2771	1.015
2791	1.546

Material Type	Part No.	A Dia.	B Current Part Height	C Part Height Capab.	Hub Dia.	Threaded Female Insert: 8-32	10-24	10-32	1/4-20	1/4-28	5/16-18	5/16-24	3/8-16	3/8-24	1-2/13	1/2-20	Threaded Male Stud*: 8-32	10-24	10-32	1/4-20	1/4-28	5/16-18	5/16-24	3/8-16	3/8-24	1-2/13	1/2-20	Female Insert: 1/4	5/16	3/8	Molded/Tapped Threads: 8-32	10-24	10-32	1/4-20	1/4-28	5/16-18	5/16-24	3/8-16	3/8-24	1-2/13	1/2-20
TP	2750	1	21/32, 51/64	.656-.750	5/8	▲	▲	■	■	▲	■	▲	■	▲			▲	■	■	■	■	■	■	■	■															
TP	2751	1	49/64	.766-1.000	5/8	▲	▲	■	■	▲	■	▲	■	▲			▲	■	■	■	■	■	■	■	■															
TP	2752	1	51/64	.796-1.125	5/8			■	■		■		■																										
TP	2760	27/32	21/32, 11/16	.656-.688	7/16	■	▲	■	■	▲							▲	■	■	■	■							▲			▲	▲	▲	▲	▲	▲	▲	▲	▲		
TP	2770	1 3/8	25/32, 1 5/64	.781-1.125	3/4	▲	▲	▲	■	▲	■	▲	■	▲	▲	▲	▲	▲	▲	■	■	■	■	■	■	▲	▲													
TP	2771	1 3/8	45/64, 47/64, 3/4	.703-1.000	3/4	▲	▲	▲	■	▲	■	▲	■	▲	▲	▲	▲	▲	▲	■	■	■	■	■	■	▲	▲													
TP	2772	1 3/8	49/64	.766-1.093	3/4				■		■		■																										
TP	2780	1 23/32	1 1/32, 1 3/32	N/A	1	▲	▲	▲	■	▲	■	▲	■	▲			▲	▲	▲	■	■	■	■	■	■			■	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
TP	2790	1 7/8	1/2, 31/32	.500-1.000	1	▲	▲	▲	■	▲	■	▲	■	▲	▲	▲	▲	▲	▲	■	■	■	■	■	■	▲	▲													
TP	2791	1 7/8	27/32	.844-1.125	1	▲	▲	▲	■	▲	■	▲	■	▲	▲	▲	▲	▲	▲	■	■	■	■	■	■	▲	▲													
TP	2792	1 7/8	63/64	.984-1.375	1				■		■		■																										

* For parts with male studs. LENGTH projecting below knob must be specified.
■ Currently Manufacture/Tooled
▲ Could Manufacture/Requires Tooling
TS Thermoset
TP Thermoplastic

Advance Components
2920 Commodore Dr, Suite 100 • Carrollton, TX 75007 • 972-446-5500
www.advancecomponents.com

Knurled/Scalloped Clamping

Another solid family of phenolic utility knobs for mechanical and electric applications. Good heat resistance and durability. Engraving, hot stamping, and pad printing available for all parts.

3030/3080

3050/3055/3065

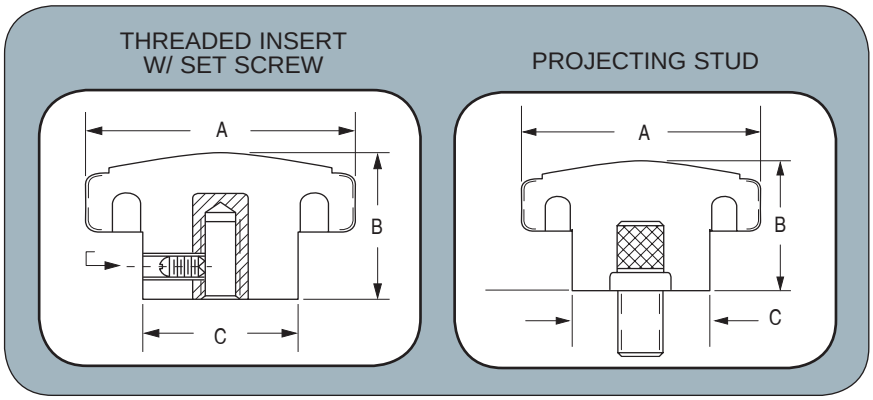

Material Type	Part No.	A Dia.	B Current Part Height	C Part Height Capab.	Hub Dia.	Threaded Female Insert 8-32	10-24	10-32	1/4-20	1/4-28	5/16-18	5/16-24	3/8-16	3/8-24	1-2/13	1/2-20	Threaded Male Stud* 8-32	10-24	10-32	1/4-20	1/4-28	5/16-18	5/16-24	3/8-16	3/8-24	1-2/13	1/2-20
TS	3030	1 3/4	25/32, 1 1/32, 1 9/32, 1 1/4	.781-1.250	3/4	▲	■	■	■	■	■	■	■	■	▲	▲	▲	▲	▲	■	■	■	■	■	■	▲	▲
TS	3050	1 3/4	15/16, 31/32, 1 1/4	.934-1.375	1	▲	■	■	■	▲	■	■	■	■	▲	▲	▲	▲	▲	■	■	■	■	■	■	■	■
TS	3055	1 1/4	3/4, 1 1/16	.750-1.250	3/4	▲	■	■	■	▲	■	■	■	■	▲	▲	▲	■	■	■	■	■	■	■	■	▲	▲
TS	3065	1	1/2, 9/16, 3/4, 1	.500-1.125	5/8	■	■	■	■	▲	▲	▲	▲	▲			▲	■	■	■	■	■	■	■	▲		
TS	3080	1 1/4	3/4, 7/8, 1 5/16	.750-1.375	5/8	▲	▲	■	■	▲	■	▲	▲	▲			▲	▲	■	■	■	■	▲	■	▲		

* For parts with male studs. LENGTH projecting below knob must be specified.
■ Currently Manufacture/Tooled
▲ Could Manufacture/Requires Tooling
TS Thermoset
TP Thermoplastic

Advance Components
2920 Commodore Dr, Suite 100 • Carrollton, TX 75007 • 972-446-5500
www.advancecomponents.com