


Speed Nuts® Flat Type




0: Round (Sides Cut Off)

1: Rectangular

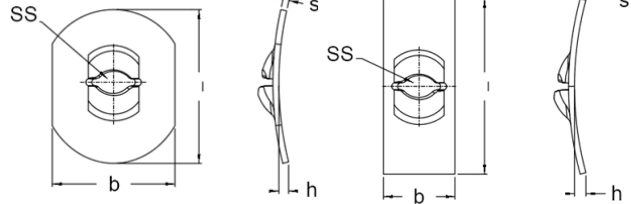

- Used with screws to hold two panels together
- Replace threaded nuts, lock washers and spanner washers
- Require less torque than standard hex nuts
- Fast and easy to install
- Provide maximum holding power at minimum cost per fastener
- Won't shake loose from vibration, yet can be easily loosened when desired without worry about rust-frozen screw threads
- Can be installed prior to painting processes so threads won't fill
- Used in smaller applications where space is limited, such as small electrical or mechanical devices

APPLICATION INFORMATION



Part Number	Legacy Part Number	Thread Specification (SS)	Length (l)	Width (b)	Material Thickness (s)	Part Shape
135775	C07795-440	4-40	0.440	0.250	0.012	1
136624	C08595-012	6-32	0.380	0.343	0.012	0
136600	C07000-8	8-18 (ST4.2)	0.630	0.410	0.028	1
136601	C07000-832	8-32	0.500	0.310	0.017	1
136597	C07000-10	10-16 (ST4.8)	0.750	0.500	0.031	1
136513	C00917-10Z	10-16 (ST4.8)	0.870	0.375	0.031	1
136520	C01150-1024	10-24	0.750	0.437	0.022	1
136521	C01151-1024	10-24	0.750	0.437	0.022	1
136598	C07000-1420	1/4-20	0.750	0.500	0.025	1
136634	C09375-012	1/4-20	1.310	1.312	0.012	1
136632	C09186-014	5/16-18	0.880	0.687	0.014	0
136625	C08617-017	3/8-16	1.000	0.687	0.017	1
136522	C01156-014	7/16-20	0.910	0.687	0.014	0
137472	D07516-017	1/2-13	1.220	0.875	0.017	1

Most parts manufactured in spring steel