



Heyco® Universal Bushings

Mounting Hole Diameter Range: .500" (12,7 mm) to 3.000" (76,2 mm)

- Flexible shutters adjust to accommodate and support any shape from .125" (3,2 mm) to a maximum inside diameter of 2.470" (62,7 mm).
- Absorb vibration and cushion and insulate cables, tubing, hoses or shafts.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Fingertip pressure snap-locks the bushing into its mounting hole.

| MOUNTING HOLE DIAMETER | | PART NO. | | DESCRIPTION | Maximum Inside Diameter | | PART DIMENSIONS A Head Diameter | | B Overall Height | |
|------------------------|-----|----------|-------|-------------|-------------------------|-----|---------------------------------|-----|------------------|-----|
| in. | mm. | Black | White | | in. | mm. | in. | mm. | in. | mm. |

Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)


| | | | | | | | | | | |
|-------|------|------|------|--------------|------|------|------|------|-----|------|
| .500 | 12,7 | 2055 | 2056 | UB 500 | .31 | 7,6 | .60 | 15,2 | .39 | 9,8 |
| .625 | 15,9 | 2077 | 2076 | UB 625 | .44 | 11,1 | .73 | 18,5 | .41 | 10,3 |
| .750 | 19,1 | 2089 | 2085 | UB 750 | .50 | 12,7 | .84 | 21,4 | | |
| .812 | 20,6 | 2106 | 2107 | UB 812 | .50 | 12,7 | .89 | 22,6 | .39 | 9,9 |
| .875 | 22,2 | 2119 | 2129 | UB 875 | .56 | 14,3 | .94 | 23,8 | .45 | 11,5 |
| | | 2118 | - | UB 875-112* | | | | | | |
| 1.000 | 25,4 | 2137 | 2138 | UB 1000 | .75 | 19,1 | 1.06 | 27,0 | .44 | 11,2 |
| 1.093 | 27,8 | 2157 | 2162 | UB 1093 | .81 | 20,6 | 1.16 | 29,5 | .45 | 11,5 |
| 1.187 | 30,2 | 2153 | 2154 | UB 1187 | .95 | 24,1 | 1.25 | 31,8 | | |
| 1.250 | 31,8 | 2155 | 2156 | UB 1250 | 1.02 | 25,8 | 1.31 | 33,4 | | |
| 1.375 | 34,9 | 2184 | 2185 | UB 1375 | 1.00 | 25,4 | 1.49 | 37,8 | | |
| | | 2187 | - | UB 1375-1750 | 1.00 | 25,4 | 1.75 | 44,5 | | |
| 1.500 | 38,1 | 2213 | 2214 | UB 1500 | 1.06 | 26,9 | 1.61 | 40,9 | | |
| 1.750 | 44,5 | 2298 | 2299 | UB 1750 | 1.38 | 34,9 | 1.87 | 47,5 | .47 | 11,8 |
| 2.000 | 50,8 | 2422 | 2423 | UB 2000 | 1.64 | 41,6 | 2.13 | 54,0 | .49 | 12,4 |

Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)

| | | | | | | | | | | |
|-------|------|------|------|----------|------|------|------|------|-----|-------|
| 2.500 | 63,5 | 2440 | 2441 | UB 2.500 | 1.97 | 50,0 | 2.63 | 66,8 | .75 | 19,05 |
| 3.000 | 76,2 | 2460 | 2463 | UB 3.000 | 2.47 | 62,7 | 3.15 | 80,0 | | |

Standard colors black and white. Consult Heyco for other colors.

*UB 875-112 inside diameter adjusts for 1/8" to 5/8" cables; UB 875 adjusts for 3/16" to 9/16" cables.

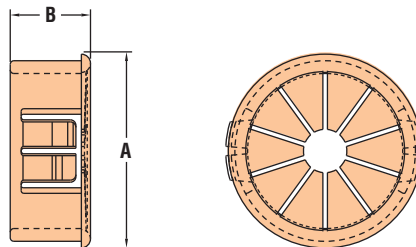

Quick Specs

| | |
|---------------------|---|
| Material | Nylon 6/6 |
| Certifications | Recognized under the Component Program of Underwriters' Laboratories, File E15331 Certified by Canadian Standards Association, File 8919 |
| Flammability Rating | 94V-2 |
| Temperature Range | -4°F (-18°C) to 221°F (105°C) |