



“Stay Connected” with



HEYware Products

a PennEngineering® Company



Heyco® Nylon Hose Clamps

| EFFECTIVE CLAMP RANGE | | | | PART NO. | | | DESCRIPTION | PART DIMENSIONS | | | |
|-----------------------|------|------------------|------|-----------|-------|-----------|-------------|-----------------|-----|-----|-----|
| Minimum Diameter | | Maximum Diameter | | 6/6 NYLON | | GF* NYLON | | A | | B | |
| in. | mm. | in. | mm. | Black | White | Black | | in. | mm. | in. | mm. |
| Regular Style | | | | | | | | | | | |
| .25 | 6,4 | .31 | 7,9 | — | — | 2302 | HC 250 | .13 | 3,2 | .04 | 1,0 |
| .34 | 8,7 | .41 | 10,3 | 2306 | 2307 | 2308 | HC 344 | .21 | 5,3 | .07 | 1,8 |
| .41 | 10,3 | .47 | 11,9 | 2310 | 2311 | 2312 | HC 406 | | | | |
| .47 | 11,9 | .53 | 13,5 | 2314 | 2315 | 2316 | HC 468 | | | | |
| .53 | 13,5 | .59 | 15,1 | 2318 | 2319 | 2320 | HC 531 | | | | |
| .59 | 15,1 | .66 | 16,7 | 2322 | 2323 | 2324 | HC 593 | | | | |
| .67 | 17,1 | .81 | 20,6 | 2326 | 2327 | 2328 | HC 672 | | | | |
| .75 | 19,1 | .88 | 22,2 | 2330 | 2331 | 2332 | HC 750 | | | | |
| .88 | 22,2 | 1.00 | 25,4 | 2334 | 2335 | 2336 | HC 875 | | | | |
| .95 | 24,1 | 1.09 | 26,2 | 2338 | 2339 | 2340 | HC 953 | | | | |
| 1.03 | 26,2 | 1.19 | 30,2 | 2342 | 2343 | 2344 | HC 1031 | | | | |
| 1.25 | 31,8 | 1.44 | 36,5 | 2346 | 2347 | 2348 | HC 1250 | | | | |
| 1.41 | 35,7 | 1.63 | 41,3 | 2350 | 2351 | 2352 | HC 1406 | .36 | 9,1 | | |
| 1.59 | 40,4 | 1.81 | 46,0 | 2354 | 2355 | 2356 | HC 1593 | | | | |
| 1.69 | 42,9 | 1.91 | 48,4 | 2358 | 2359 | 2360 | HC 1687 | | | | |
| 1.88 | 47,6 | 2.13 | 54,0 | 2362 | 2363 | 2364 | HC 1875 | | | | .40 |

| Strap Mate Style | | | | | | | | | | | |
|-------------------------|-------|------|-------|---|---|------|---------|-----|------|-----|-----|
| 2.25 | 57,1 | 2.88 | 73,0 | - | - | 2377 | HC 2.25 | .44 | 11,2 | .08 | 2,0 |
| 2.75 | 69,8 | 3.63 | 92,1 | - | - | 2380 | HC 2.75 | | | | |
| 3.50 | 88,9 | 4.25 | 108,0 | - | - | 2383 | HC 3.5 | | | | |
| 4.00 | 101,6 | 5.00 | 127,0 | - | - | 2386 | HC 4.0 | | | | |


Standard colors 6/6 nylon black and white. Glass filled nylon standard color is black.
 *HC 250 features a single tang design in glass-filled nylon only.

- **Quick and easy installation.** Tighten instantly with hand pliers or Air Tools.
- **Reusable.** Can be removed without cutting.
- Glass-filled nylon clamps offer additional clamping strength.
- Outlast tubing under pressure.
- Lightweight yet resist corrosion, salt water, weak acids, grease, and common solvents.


Available in Small Packs **NEW**

| PART NO. | DESCRIPTION | QTY |
|----------|--------------------|-----|
| 2307-P | HC 344 WHITE 20PK | 20 |
| 2311-P | HC 406 WHITE 20PK | |
| 2315-P | HC 468 WHITE 20PK | |
| 2319-P | HC 531 WHITE 20PK | |
| 2323-P | HC 593 WHITE 20PK | |
| 2327-P | HC 672 WHITE 20PK | |
| 2331-P | HC 750 WHITE 20PK | |
| 2335-P | HC 875 WHITE 20PK | |
| 2339-P | HC 953 WHITE 20PK | |
| 2343-P | HC 1031 WHITE 20PK | |
| 2347-P | HC 1250 WHITE 20PK | |
| 2351-P | HC 1406 WHITE 20PK | |

Regular Style



Strap Mate Style




Heyco® Pneumatic Air Tool for Nylon Hose Clamps

For Lockit and Regular Style Hose Clamps only

| AIR TOOL PART NO. INCLUDING JAWS | JAW PART NO.* | |
|----------------------------------|---------------|-------|
| | Upper | Lower |
| 0170 | 0T83 | 0T84 |

*Jaw Part No. if purchased separately.

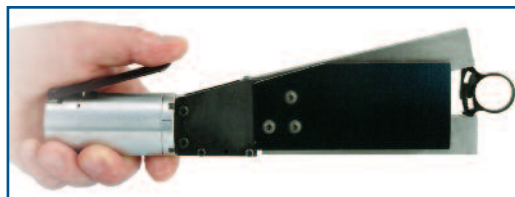

- Allows for a **semi-automated process** which increases speed over manual tools.
- Activated by hand lever reducing stress on the hand and the risk of carpal tunnel syndrome associated with repetitive assembly.
- Maximum Pressure Rating: 125 psi
- Adjustable jaws allow tool to accommodate a wide range of Heyco Hose Clamps.
- Operates only when lever is depressed.
- Tool operates on standard shop air.

| | |
|---------------------|--|
| Materials | Nylon 6/6 or glass-filled Nylon |
| Flammability Rating | 94V-2 for 6/6 Nylon, 94HB for glass-filled Nylon |
| Temperature Range | 32°F (0°C) to 221°F(105°C) |