



## Heyco® Open/Closed Bushings

Mounting Hole Diameter Range: .375" (9,5 mm) to 2.500" (63,5 mm)

| MOUNTING HOLE DIAMETER |     | PART NO. | DESCRIPTION | PART DIMENSIONS   |     |                 |     |                  |     |
|------------------------|-----|----------|-------------|-------------------|-----|-----------------|-----|------------------|-----|
| in.                    | mm. |          |             | A Inside Diameter |     | B Head Diameter |     | C Overall Height |     |
| Black                  |     |          |             | in.               | mm. | in.             | mm. | in.              | mm. |

Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)



|                  |      |             |          |      |      |      |      |     |      |
|------------------|------|-------------|----------|------|------|------|------|-----|------|
| .375             | 9,5  | <b>2865</b> | OCB 375  | .27  | 6,7  | .42  | 10,7 | .39 | 9,9  |
| .437             | 11,1 | <b>2867</b> | OCB 437  | .33  | 8,4  | .50  | 12,7 | .41 | 10,3 |
| .500             | 12,7 | <b>2871</b> | OCB 500  | .31  | 7,9  | .56  | 14,3 |     |      |
| <b>NEW!</b> .512 | 13,0 | <b>2875</b> | OCB 512  | .35  | 9,0  | .59  | 14,9 |     |      |
| .562             | 14,3 | <b>2869</b> | OCB 562  | .39  | 9,9  | .64  | 16,3 |     |      |
| .625             | 15,9 | <b>2872</b> | OCB 625  | .45  | 11,1 | .69  | 17,5 |     |      |
| <b>NEW!</b> .650 | 16,5 | <b>2914</b> | OCB 650  | .48  | 12,3 | .73  | 18,6 |     |      |
| .750             | 19,1 | <b>2873</b> | OCB 750  | .55  | 12,7 | .78  | 19,8 |     |      |
| <b>NEW!</b> .866 | 22,0 | <b>2917</b> | OCB 866  | .68  | 17,3 | .98  | 24,8 |     |      |
| .875             | 22,2 | <b>2874</b> | OCB 875  | .67  | 14,3 | .92  | 23,4 |     |      |
| <b>NEW!</b> .984 | 25,0 | <b>2920</b> | OCB 984  | .80  | 20,4 | 1.04 | 26,4 |     |      |
| 1.000            | 25,4 | <b>2878</b> | OCB 1000 | .81  | 19,1 | 1.05 | 26,6 |     |      |
| 1.093            | 27,8 | <b>2879</b> | OCB 1093 | .88  | 20,6 | 1.16 | 29,4 |     |      |
| 1.250            | 31,8 | <b>2881</b> | OCB 1250 | 1.05 | 25,8 | 1.34 | 34,1 |     |      |
| 1.375            | 34,9 | <b>2882</b> | OCB 1375 | 1.17 | 25,4 | 1.47 | 37,3 |     |      |
| 1.500            | 38,1 | <b>2883</b> | OCB 1500 | 1.25 | 26,9 | 1.58 | 40,1 | .42 | 10,7 |
| 2.000            | 50,8 | <b>2900</b> | OCB 2000 | 1.73 | 43,9 | 2.12 | 53,9 |     |      |

Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)

|       |      |             |         |      |      |      |      |     |      |
|-------|------|-------------|---------|------|------|------|------|-----|------|
| 2.500 | 63,5 | <b>2909</b> | OCB 2.5 | 2.00 | 50,8 | 2.60 | 66,0 | .72 | 18,3 |
|-------|------|-------------|---------|------|------|------|------|-----|------|

Standard color black. Consult Heyco for white and other colors.

- **Split design allows side entry** and encirclement of preassembled harnesses, capillary tubes, computer cables, power cords, or other assemblies that have segments larger than the bushing's I.D.
- May also be assembled into holes that already contain cable, wire or other filaments.
- Fingertip pressure snap-locks the bushing into its mounting hole.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Multiple sizes for use in mounting holes from .375" (9,5 mm) to 2.500" (63,5 mm).

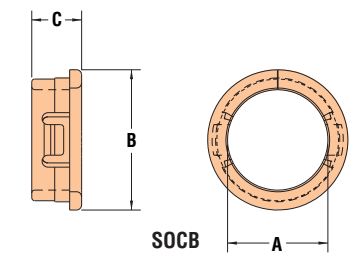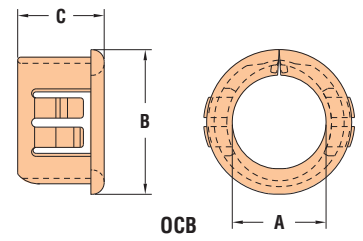

**ALL NEW PRODUCTS!**

## Heyco® Open/Closed Shorty Bushings

Single Locking Step for Panel Thickness up to .062" (1,6 mm)

Mounting Hole Diameter Range: 7,0 mm (.276") 27,0 mm (1.063")

| MOUNTING HOLE DIAMETER |      | PART NO.    | DESCRIPTION | PART DIMENSIONS   |      |                 |      |                  |     |
|------------------------|------|-------------|-------------|-------------------|------|-----------------|------|------------------|-----|
| in.                    | mm.  |             |             | A Inside Diameter |      | B Head Diameter |      | C Overall Height |     |
| Black                  |      |             |             | in.               | mm.  | in.             | mm.  | in.              | mm. |
| .276                   | 7,0  | <b>2934</b> | SOCB 07M    | .22               | 5,6  | .35             | 8,9  | .24              | 6,0 |
| .512                   | 13,0 | <b>2938</b> | SOCB 13M    | .38               | 9,7  | .56             | 14,2 | .25              | 6,4 |
| .630                   | 16,0 | <b>2941</b> | SOCB 16M    | .52               | 13,2 | .71             | 18,0 |                  |     |
| .748                   | 19,0 | <b>2943</b> | SOCB 19M    | .63               | 16,0 | .83             | 21,1 |                  |     |
| .866                   | 22,0 | <b>2945</b> | SOCB 22M    | .75               | 19,1 | .98             | 24,9 |                  |     |
| .945                   | 24,0 | <b>2947</b> | SOCB 24M    | .82               | 20,8 | 1.06            | 26,9 |                  |     |
| 1.063                  | 27,0 | <b>2950</b> | SOCB 27M    | .95               | 24,8 | 1.13            | 28,7 |                  |     |
|                        |      |             |             |                   |      |                 |      |                  |     |

Standard color black. Consult Heyco for white and other colors.

- **For use in panels .062" (1,6 mm) and thinner.**
- Lower overall height protrudes less through thin mounting panels; thus Shorty Open/Closed Bushings occupy less "real estate" inside your application.
- **Split design allows side entry** and encirclement of preassembled harnesses, power cords, capillary tubes or other assemblies that have segments larger than the bushing's ID.
- May also be assembled into holes that already contain cable, wire or other filaments.
- Fingertip pressure snap-locks the bushing into its mounting hole.

|                     |   |
|---------------------|---|
| Material            | Nylon 6/6   |
| Certifications      | Recognized under the Component Program of Underwriters' Laboratories File E15331<br>Certified by the Canadian Standards Association File 8919 |
| Flammability Rating | 94V-2   |
| Temperature Range   | -4°F (-18°C) to 221°F (105°C)   |