





- Molded of **transparent** polycarbonate for internal viewing or light transmission.
- Snap into mounting holes with fingertip pressure—no tools required.
- Multiple sizes for use in .187” (4,7 mm) to 2.000” (50,8 mm) diameter holes.
- Lock firmly into panel up to .125” (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062” (1,6 mm). Thickness may vary.

## Heyco® Window “View Port” Plugs



Mounting Hole Diameter Range: .187” (4,7 mm) to 2.000” (50,8 mm)

MOUNTING HOLE DIAMETER		PART NO. Clear*	DESCRIPTION	PART DIMENSIONS			
in.	mm.			A Head Diameter		B Overall Height	
				in.	mm.	in.	mm.
Single Locking Step for Panel Thickness up to .062” (1,6 mm)							
.187	4,7	<b>1300</b>	WP 187	.25	6,4	.23	5,9
.250	6,4	<b>1301</b>	WP 250	.31	7,9	.31	7,9
.312	7,9	<b>1302</b>	WP 312	.38	9,5	.31	7,9
Multiple Locking Steps for Panel Thickness up to .125” (3,2 mm)							
.375	9,5	<b>1303</b>	WP 375	.47	11,9	.41	10,3
.437	11,1	<b>1304</b>	WP 437	.53	13,5		
.500	12,7	<b>1305</b>	WP 500	.56	14,3		
.625	15,9	<b>1307</b>	WP 625	.73	18,6		
.760	19,3	<b>1309</b>	WP 750	.86	21,8	.45	11,5
.875	22,2	<b>1311</b>	WP 875	.95	24,2		
1.000	25,4	<b>1312</b>	WP 1000	1.13	28,6		
1.093 - 1.125	27,8 - 28,6	<b>1313</b>	WP 1093	1.22	30,9		
1.375	34,9	<b>1314</b>	WP 1375	1.50	38,1		
1.500	38,1	<b>1316</b>	WP 1500	1.62	41,2		
1.750	44,5	<b>1318</b>	WP 1750	1.88	47,6		
2.000	50,8	<b>1319</b>	WP 2000	2.16	54,8		


\*Consult Heyco for Window Plugs in tinted colors.

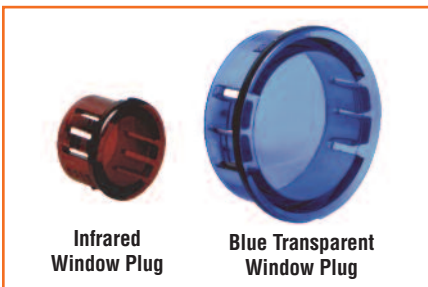

SINGLE PANEL THICKNESS DESIGN



MULTIPLE PANEL THICKNESS DESIGN



*Quick Specs*

Material	Polycarbonate
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 239°F (115°C)




## Heyco® Shorty Window “View Port” Plugs

Single Locking Step for Panel Thickness up to .062” (1,6 mm)  
Mounting Hole Diameter Range: .510” (13,0 mm) to 1.010” (25,7 mm)

MOUNTING HOLE DIAMETER		PART NO. Clear*	DESCRIPTION	PART DIMENSIONS			
in.	mm.			A Head Diameter		B Overall Height	
.510	13,0	1292	SWP 510	.56	14,3	.25	6,4
.635	16,1	1293	SWP 635	.73	18,6		
.760	19,3	1294	SWP 760	.86	21,8		
.885	22,5	1295	SWP 885	.95	24,2		
1.010	25,7	1296	SWP 1010	1.13	28,6		

\*Consult Heyco for Shorty Window Plugs in tinted colors.

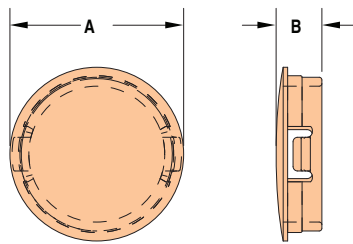


## Heyco® Oval Window “View Port” Plug

Multiple Locking Steps for Panel Thickness up to .125” (3,2 mm)

MOUNTING HOLE DIAMETER		PART NO. Clear*	DESCRIPTION	PART DIMENSIONS			
in.	mm.			Head Diameter		Overall Height	
see schematic		1299	OWP 875-2000	2.13 - 1.01	54,4 - 26,6	.46	11,7

\*Consult Heyco for Oval Window Plugs in tinted colors.

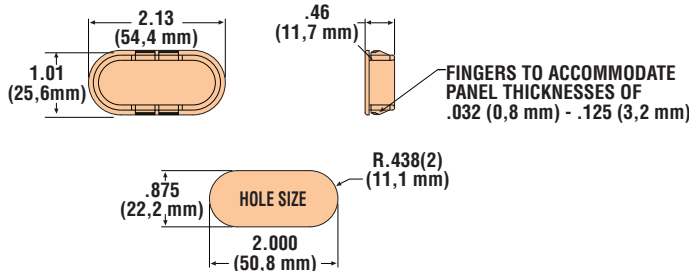

- Lock firmly into panels up to .062” (1,6 mm) thick, with **limited intrusion** inside the panel.
- Molded of transparent polycarbonate for internal viewing or light transmission.
- Snap into mounting holes with fingertip pressure—no tools required.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Multiple sizes for use in .510” (13,0 mm) to 1.010” (25,7 mm) diameter holes.
- Flammability Rating 94V-2.
- **Available in a variety of tints** —consult Heyco.



- **Large viewing window** for internal components.
- Locking fingers in fractional increments up to the maximum panel thickness.



Material	Polycarbonate
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 239°F (115°C)

Quick Specs